


PARAMOUNT CONCEPTS LTD.


The Paramount J™

Fast, easy installation (saving labor) without the need to juggle flex, strap, cutter, hammer, etc.

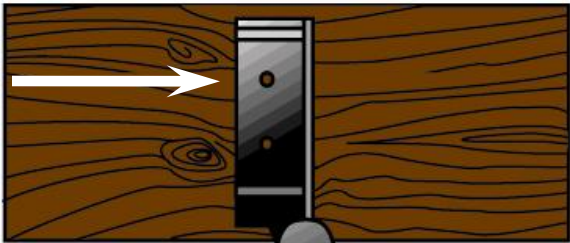

Flexible material allows corners in flex runs, and can be twisted to easily move flex in or out of the hanger.


Material is heat, cold and UV resistant.

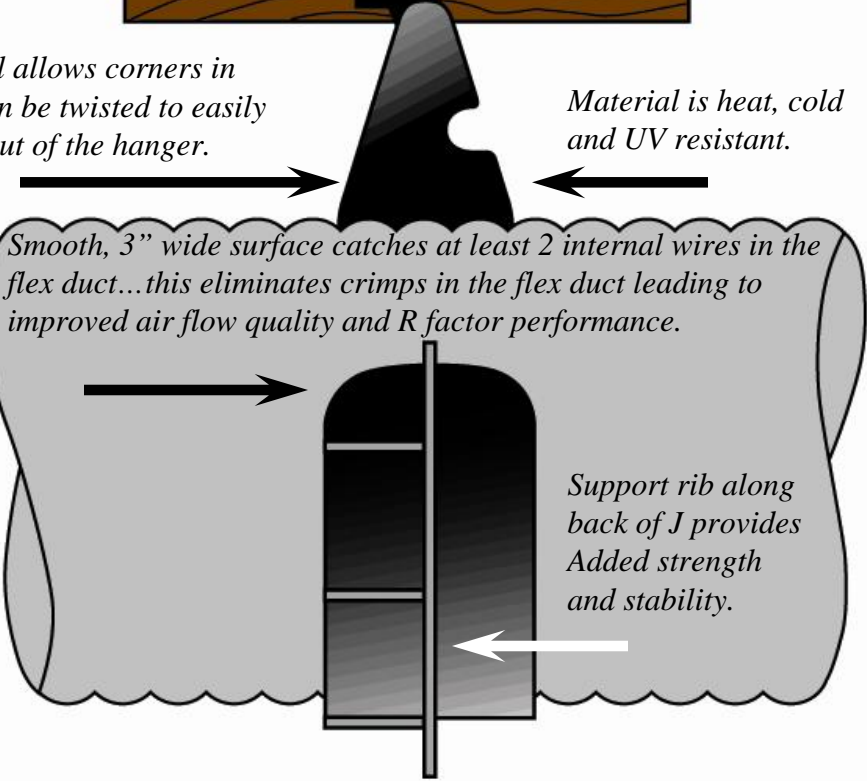

Smooth, 3" wide surface catches at least 2 internal wires in the flex duct...this eliminates crimps in the flex duct leading to improved air flow quality and R factor performance.

Support rib along back of J provides Added strength and stability.

Versatile hanger may be used to support the installation of sheet metal duct (even insulated duct) or spiral pipe.



10" diameter accommodates common duct sizes. Simply nail or screw the hanger into place on the joists. Spacing should be approximately 5 feet between hangers (consistent with Air Diffusion Council standards). Then place the duct into the hanger. Fast, easy, effective.